

# DH-DVR0404/0804/1604HE-T-4H

4/8/16 Channel Full-D1 & 4 Channel 1080P Hybrid DVR



DH-DVR0404HE-T-4H: 4 channel analog video inputs with Full-D1 recording, 4 channel IP video inputs with 1080P@H.264 / 720P@MPEG4, 4 channel audio inputs, 4 channel loop outputs and 1 channel matrix output. It can support VGA, HDMI, eSATA and USB2.0.


DH-DVR0804HE-T-4H: 8 channel analog video inputs with Full-D1 recording, 4 channel IP video inputs with 1080P@H.264 / 720P@MPEG4, 8 channel audio inputs, 8 channel loop outputs and 1 channel matrix output. It can support VGA, HDMI, eSATA and USB2.0.

DH-DVR1604HE-T-4H: 16 channel analog video inputs with Full-D1 recording, 4 channel IP video inputs with 1080P@H.264 / 720P@MPEG4, 16 channel audio inputs, 16 channel loop outputs and 1 channel matrix output. It can support VGA, HDMI, eSATA and USB2.0.

## Features

- 4/8/16 channel analog and 4 channel IP inputs hybrid DVR
- Up to 8/12/20 cameras with Full HD 1080P display
- H.264 compression and H.264/MPEG4 decoding
- 4/8/16 channels analog video at D1 realtime recording
- 4 channels IP video at 1080P/720P realtime recording
- Dual encoding streams supported
- TV(BNC)/VGA/HDMI synchronous video output
- Live, recording, playback, backup & remote access
- 16 channel simultaneous playback
- Smart video detection: MD, camera blank, video loss
- 3D intelligent positioning with DAHUA PTZ dome
- Easy backup: USB devices, CD/DVD-RW & network download
- Alarm triggering screen tips, buzzer, PTZ, e-mail, FTP upload
- Up to 8 SATA HDDs & CD/DVD-RW, 1 eSATA, 2 USB2.0
- Built-in web server, multi-DVR client, DMSS & CMS

## System Connection

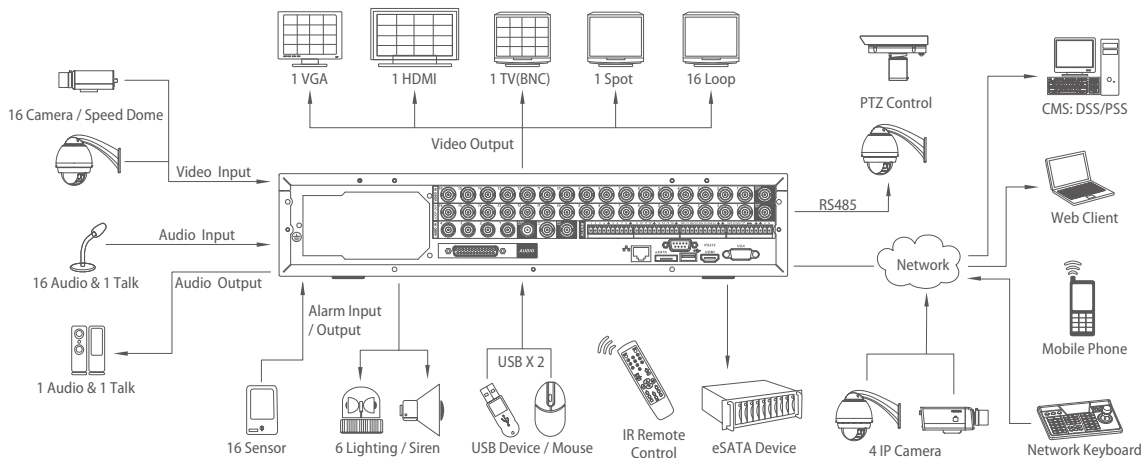

\* Take DVR1604HE-T-4H for the example

## Specifications

Model		DH-DVR0404HE-T-4H	DH-DVR0804HE-T-4H	DH-DVR1604HE-T-4H
System	Main Processor	High performance embedded microprocessor		
	Operating System	Embedded LINUX		
	System Resources	Pentaplex function: live, recording, playback, backup & remote access		
	Control Mode	Front panel, USB mouse, IR remote control, Keyboard, Network		
Video	Analog Input	4 channel, BNC(1.0Vp-p, 75Ω)	8 channel, BNC(1.0Vp-p, 75Ω)	16 channel, BNC(1.0Vp-p, 75Ω)
	IP Input	4 channel, 1080P@H.264, 720P@MPEG4 IPC-HF3300, IPC-HF3211, IPC-F715, IPC-F725, HD6681-HN, SD666xD-HN, IPC-F6x5, IPC-A7, IPC-K5/6		
	Standard	NTSC(525Line, 60f/s), PAL(625Line, 50f/s)		
	Output	1 TV, 1 Spot, BNC(1.0Vp-p, 75Ω), 1 VGA, 1 HDMI		
	Loop Output	4 channel	8 channel	16 channel
Audio	Input	4 channel, BNC(200-2800mV, 30KΩ)	8 channel, BNC(200-2800mV, 30KΩ)	16 channel, BNC(200-2800mV, 30KΩ)
	Output	1 channel, BNC(200-3000mV, 5KΩ)		
	Bidirectional Talk	1 channel Input, BNC(200-2800mV, 30KΩ), 1 channel Output, BNC(200-3000mV, 5KΩ)		
Display	Display Split	1/4/8/9	1/4/8/9/16	1/4/8/9/16/20
	Resolution	1920×1080, 1280×1024, 1280×720, 1024×768, 800×600		
	Tour Display	Support		
	Privacy Masking	4 self-defined four-sided zones for privacy masking for each camera		
	OSD	Camera title, time, video loss, camera lock, motion detection, recording		
Recording	Video/Audio Compression	H.264 / G.711		
	Image Resolution	1080P(1920×1080) / 720P(1280×720) / D1/4CIF(704×576/704×480) / HD1(352×576/352×480) / 2CIF(704×288/704×240) / CIF(352×288/352×240) / QCIF(176×144/176×120)		
	Encoding Speed	Main Stream: 1080P/720P/D1/HD1/2CIF/CIF(1~25/30fps) Extra Stream: CIF/QCIF(1~25/30fps)		
	Bit Rate	Analog video: 32~2048Kb/s, IP video: 32~4096Kb/s		
	Image Quality	1~6 level(level 6 is the best, VBR effectively)		
	Recording Mode	Manual, Schedule(Regular(Continuous), MD(Video detection: Motion detection, Camera blank, Video loss), Alarm), Stop		
	Recording Priority	Manual > Alarm > MD > Regular		
	Recording Interval	1~120 min. (default: 60 min.), Pre-record: 1~30 sec., Post-record: 10~300 sec.		
Video Detection & Alarm	Trigger Events	Recording, PTZ movement, Tour, Alarm, Email, Spot output		
	Motion Detection	Zones: 396(22×18), Sensitivity: 1~6 (level 6 is highest)		
	Video Loss & Camera Blank	Support		
	Alarm Input	4 channel	8 channel	16 channel
	Relay Output	6 channel		
Playback & Backup	Playback Channel	1/2/4/All		
	Search Mode	Time/Date, Alarm, Motion Detection & Exact search (accurate to second)		
	Playback Functions	Play, Pause, Stop, Rewind, Fast play, Slow play, Next file, Previous file, Next camera, Previous camera, Full screen, Repeat, Shuffle, Backup selection, Digital zoom(any size)		
	Backup Mode	Flash drive/ USB HDD/ USB CD/DVD-RW / eSATA Device / Built-in SATA burner/ Network download		
Network	Ethernet	RJ-45 port (10/100M)		
	Network Functions	TCP/IP, UDP, DHCP, DNS, IP Filter, PPPOE, DDNS, FTP, Email, Alarm Server		
	Remote Operation	Monitor, PTZ control, Playback, System setting, File download, Log information		
Hard Disk	Hard Disk	8 SATA ports, 8 HDDs or 6 HDDs + 1 CD/DVD-RW, Max 2TB per HDD supported		
	Space Occupation	Audio: 28.8MB/H, Video: 56~900MB/H		
	HDD Management	Hard disk hibernation technology, HDD faulty alarm & Raid(Redundancy)		
Auxiliary Interface	USB Interface	2 ports, 1 for mouse control, 1 for backup		
	eSATA	1 port		
	RS232	Dahua keyboard, PC communication		
	RS485	PTZ control		
Environmental	Power Supply	AC 100~240 V, 50/60 Hz		
	Power Consumption	25W	30W	40W
	Working Environment	-10~+55°C / 10~90%RH / 86~106kpa		
	Dimension	2U, 440mm×460mm×89mm(W×D×H)		
	Weight	6.5KG(without HDD)		